

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
4 October 2001 (04.10.2001)

PCT

(10) International Publication Number  
**WO 01/73987 A2**

(51) International Patent Classification<sup>7</sup>: **H04J 3/00**

(21) International Application Number: **PCT/IB01/00501**

(22) International Filing Date: **27 March 2001 (27.03.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
**09/539,262** **30 March 2000 (30.03.2000)** **US**

(71) Applicant: **ADC TELEDATA COMMUNICATIONS LTD.** (IL/IL); 10 Ha'Sadnaot Street, 46120 Herzliya (IL).

(72) Inventors: **KLIPPER, Joshua**; 3A Harav Hacohen Hanazir Street, 42369 Netanya (IL). **ROUCHBACH, David**; Charzit 5/1, 42490 Netanya (IL). **DRORI, Nir**; 79 Harav David Israel Street, 75506 Rehovot (IL).

(74) Agent: **LUZZATTO, Kfir**; Luzzatto & Luzzatto, P.O. Box 5352, 84152 Beer-Sheva (IL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *without international search report and to be republished upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **INTEGRATED ADSL INTERFACE WITH TDM MAPPING**

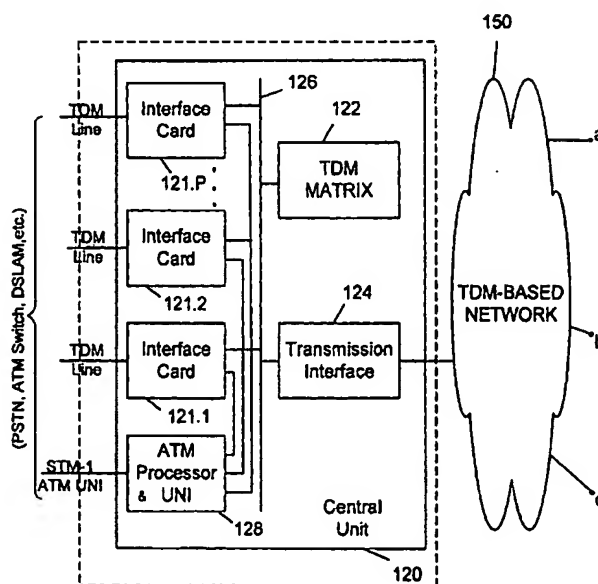

(57) Abstract: An integrated asymmetric digital subscriber line interface card with time division multiplex mapping is provided. The asymmetric digital subscriber line interface card includes an asymmetric digital subscriber line interface device and a translation device coupled to the asymmetric digital subscriber line interface device. Additionally, the asymmetric digital subscriber line interface card includes an inverse multiplexer coupled to the asymmetric digital subscriber line interface device and a time division multiplex interface coupled to the inverse multiplexer.

## INTEGRATED ADSL INTERFACE WITH TDM MAPPING

### TECHNICAL FIELD

The present invention relates generally to telecommunications, and in particular, to providing an ADSL interface using TDM mapping.

5

### BACKGROUND

Telecommunication systems originally designed for voice services at a relatively slow speed have rapidly changed to carry data at high speeds. Prior to the 1960s, the telephone system used primarily analog switches and other analog equipment. With the increasing capability of computer systems and other digital electronics, the telephone system began to include digital switches and other equipment. Digital Loop Carriers (DLCs) were developed to allow connections from a number of subscribers to be routed to a location remote from the central office and then connected to the central office over a high speed, digital line.

15       Transporting data has posed a variety of problems for conventional telephone systems. The low bandwidth channels to carry voice traffic that the telephone system was designed with can provide a significant obstacle to providing higher bandwidth data services that have become so popular, e.g. the Internet and other data networks. Additionally, the adaptation of the telephone system for high bandwidth data services has become an expensive enterprise.

20       Digital Subscriber Line (DSL) is a generic name for a family of evolving digital services to be provided by local telephone companies to their local subscribers. DSL includes but is not limited to Single Pair Symmetrical Services (SDSL), Asymmetric Digital Subscriber Line (ADSL), High Bit Rate Digital subscriber line (HDSL) and Very-high-data-rate Digital Subscriber Line (VDSL). These services provide high-speed connections over existing copper wires to carry conventional telephone traffic. These services use various modulation schemes and other techniques to allow the data to be transmitted over the existing copper lines at higher speeds. In addition to data, some of these DSL technologies allow multiple phone lines to share one physical line thus increasing the capacity of the system without the need to install additional copper connections between the customer and the network.

30

Unfortunately, DSL voice traffic is not directly compatible with conventional equipment in the Public Switched Telephone Network (PSTN). For example, DSL voice traffic conventionally is incorporated in Asynchronous Transfer Mode (ATM) packets or cells. ATM is a cell-based technology that supports voice, video, and data over a wide range of transmission speeds. The biggest benefit of ATM is its ability to optimize wide-area bandwidth while accommodating the characteristics of various traffic types, with multiple classes of service. This is different from the Time Division Multiplexing (TDM) format associated with the PSTN. In order to transmit the data additional equipment is added to the PSTN network such as ATM switches and ATM multiplexers providing ATM traffic management such as policing. The cost of providing ADSL solutions on a PSTN network is an expensive proposition and inhibits the ability of service providers to introduce new subscribers in a cost effective manner. Therefore, there is a need in the art for providing broadband services to new subscribers without the use of an expensive ATM infrastructure.

As operators begin introducing ADSL interfaces into the Access Network, the need for cost effective solutions which combine traditional narrowband services such as Plain Old Fashioned Telephone Service (POTS), Integrated Service Digital Network (ISDN) service, and narrowband data together with broadband services over ADSL becomes imperative. Solutions offered on ATM-based access platforms are often prohibitively expensive for access operators who have a small percentage of ADSL penetration together with their narrowband services. Such solutions may require ATM switching elements at all remote units, or Synchronous Digital Hierarchy/Synchronous Optical Network (SDH/SONET) transmission within the access network. What is needed is a low cost solution.

#### SUMMARY

The above mentioned problems with ADSL interfaces in Access Networks and other problems are addressed by embodiments of the present invention and will be understood by reading and studying the following specification. In one embodiment, a telecommunications network is provided. The telecommunications

network includes a plurality of remote units and a central unit coupled to the plurality of remote units over a TDM-based network. Each of the remote units include a time division multiplex bus. Asynchronous transfer mode traffic is directly mapped onto a plurality of time division multiplex lines.

5 In another embodiment, a telecommunications network is provided. The telecommunications network includes a plurality of remote units, a time division multiplex-based network coupled to the plurality of remote units and a central unit also coupled to the time division multiplex-based network. Each of the plurality of remote units includes a first time division multiplex bus. Asynchronous transfer  
10 mode traffic is directly mapped onto the first time division multiplex bus.

Additionally, a time division multiplex (TDM) remote unit is provided. The TDM remote unit includes a time division multiplex bus and a plurality of subscriber interface cards coupled to the time division multiplex bus. The plurality of subscriber interface cards comprise at least one asymmetric digital subscriber line  
15 interface card. The TDM remote unit also includes a time division multiplex matrix device and a transmission interface device each coupled to the time division multiplex bus.

An asymmetric digital subscriber line (ADSL) interface card is also provided. The ADSL interface card includes an asymmetric digital subscriber line  
20 (ADSL) interface device and a translation device coupled to the (ADSL) device. The ADSL interface card also includes an inverse multiplexer coupled to the asymmetric digital subscriber line interface device and a time division multiplex interface coupled to the inverse multiplexer.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

25 Figure 1 is a block diagram of an illustrative embodiment of an access network that provides asymmetric digital subscriber line access for subscribers using a TDM infrastructure according to the teachings of the present invention.

Figure 2 is a block diagram of an illustrative embodiment of central unit within an access network that provides asymmetric digital subscriber line access for  
30 subscribers using a TDM infrastructure according to the teachings of the present invention.

Figures 3 is a block diagram that illustrates an embodiment of an asymmetric digital subscriber line card that interfaces with a TDM-based access network according to the teachings of the present invention.

5

#### DETAILED DESCRIPTION

In the following detailed description, reference is made to the accompanying drawings which form a part hereof, and in which is shown by way of illustration specific illustrative embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that logical, mechanical and electrical changes may be made without departing from the spirit and scope of the present invention. The following detailed description is, therefore, not to be taken in a limiting sense.

Figure 1 is a block diagram of an illustrative embodiment of an access network that provides asymmetric digital subscriber line access for subscribers using a TDM infrastructure, indicated generally at 100, according to the teachings of the present invention.

The access network 100 includes a central unit 120 coupled to a TDM-based network 150 and a plurality of remote units 140-1, ... , 140-M also coupled to the TDM based network 150. Remote units 140-1, ... , 140-M are each configured to receive at least one Asymmetric Digital Subscriber Line (ADSL), Plain Old Fashioned Telephone Service (POTS), Integrated Service Digital Network (ISDN) traffic from a plurality of subscribers. The ADSL, POTS, and ISDN traffic is received from a number of subscriber devices such as telephones, facsimile machines, personal computers (PCs), televisions, modems and the like. ADSL, POTS and ISDN traffic is also received by central unit 120 and routed through TDM-based network 150 for transmission by the remote units 140-1, ... , 140-M to the plurality of subscribers and subscriber devices. Traffic includes any combination of analog or digital data from a variety of sources to include the telephone network, internet, cable television, modems, facsimile machines and the like. Access network 100 is a Digital Loop Carrier (DLC) system or platform which

directly maps ADSLs to TDM transmission lines in the remote unit then transmits ADSL, ISDN and POTS traffic to the Public Switched Telephone Network (PSTN), an Asynchronous Transfer Mode (ATM) switch, a Digital Subscriber Line Access Module (DSLAM) or other network which is capable of performing ATM processing.

TDM-based network 150 represents one or more of a TDM network, an SDH ring, a SONET ring or other appropriate network. The TDM-based network 150 is also coupled to central unit 120 for further transmission to the PSTN, ATM switch, DSLAM or other ATM processing network.

Remote units 140-1, ... , 140-M are each constructed in a similar manner. Thus for simplicity, only remote unit 140-1 is described in detail. Remote unit 140-1 includes subscriber interface cards 144-1-1, ... , 144-1-K, a TDM matrix or switching card 143-1 and a transmission interface device 141-1 which are all coupled to a time division multiplex bus 142-1. The interface cards 144-1 acts as an interface between the plurality of subscribers coupled to remote unit 140-1 and the TDM-based network 150. Remote unit 140-1 includes any combination of subscriber interface cards 144-1-1, ... , 144-1-K, e.g., analog and digital interface cards such as POTS interface cards, ISDN interface cards, ADSL interface cards and the like. The subscriber interface cards 144-1-1, ... , 144-1-K are coupled between the subscriber premises and a TDM transmission interface device 141 via the TDM bus 142. Each ADSL interface card in remote unit 144-1 directly maps ATM traffic from subscriber's ADSL lines onto TDM bus 142-1. Directly mapping the ATM traffic from the ADSL lines to TDM transmission lines does not include ATM processing such as ATM switching, assigning traffic descriptors for each connection, policing incoming traffic to insure that it meets its assigned or agreed to bandwidth requirements and the like.

In one embodiment, remote unit 140-1 includes ADSL interface cards, POTS interface cards and ISDN interface cards. In another embodiment, remote unit 140-1 includes a plurality of ADSL interface cards. In a further embodiment, remote unit 140-1 includes a plurality of ADSL interface cards, POTS interface cards and ISDN cards. In yet another embodiment, remote unit 140-1 includes POTS interface cards

and ISDN interface cards. It is understood that remote units 140-1, ... , 140-M include any number of subscriber interface cards 144-1, .... , 144-M in any appropriate combination.

In one embodiment, central unit 120 includes a plurality of TDM-based interface cards 121 and an ATM processing card with a single user-network interface (UNI) 128, a TDM matrix or switching card 122 and a transmission interface device 124 coupled to an internal TDM bus 126. Central unit 120 is coupled between TDM-based network 150 and the PSTN, an ATM switch, DSLAM or other network. ADSL data received at central unit 120 is routed by ATM processor and UNI card 128 to an ATM switch, DSLAM or network which is capable of performing ATM processing. The Central Unit 120 selectively transports ADSL, ISDN and POTS traffic from the TDM-based network 150 to the appropriate network via one of interface card 121, ... , 121-P and ATM processor and UNI card 128. The Central Unit 120 separates the traffic received from the remote units 140-1, ... , 140-M to be transmitted over appropriate interfaces cards 121, ..., 121-P, and ATM processor and UNI card 128 to central office switching equipment. For example, POTS and ISDN traffic may be switched within the central unit to digital switch interfaces such as V5.n. Central Unit 120 also selectively transports ADSL, POTS and ISDN traffic from the interface cards 121-1, ..., 121-P and ATM processor and UNI card 128 to TDM-based network 150.

ATM processor and UNI card 128 performs ATM processing to include ATM switching, assigning traffic descriptors for each connection, policing incoming traffic to insure that it meets its assigned or agreed to bandwidth requirements and the like. ATM processor and UNI card 128 then provides a single synchronous transport module 1 (STM-1) user-network interface (UNI) to the PSTN, an ATM switch, DSLAM or other network. The ATM processor and UNI card 128 concentrates all ATM traffic extracted from the E1s or T1s bearing ATM traffic from the remote units 140-1, ... , 140-M, and then processes them and forwards the ATM traffic to the PSTN, an ATM switch, DSLAM or other network via the single UNI. In the direction from the PSTN, an ATM switch, DSLAM or other network,

the single UNI receives ATM traffic, processes it, and forwards it to be mapped into E1s or T1s for transmission back towards the remote units 140-1, ... , 140-M.

Transmission interface device 141-1 located in remote units 140-1, ... , 140-M and the transmission interface device 124 located in central unit 120 include any  
5 one of an optical transmission interface device, a copper wire transmission interface device, an HDSL transmission interface device or the like.

In one embodiment, interface cards 121-1, ... , 121-P comprise E1 interface cards that link data from and to Nx E1 transmission lines. E1 transmission lines are used outside of North America and Japan and supply 32 channels at 2.048 Mbps.  
10 T1 transmission lines are mainly used in North America and supply 24 channels at 1.544 Mbps. It is understood, when referring to E1, that T1 is also included.

In operation, access network 100 is configured to provide ADSL services in a TDM network without costly ATM equipment or the need for ATM processing. In the upstream direction, ADSL, ISDN and POTS traffic is generated by subscriber  
15 devices at subscribers premise, such as telephone, facsimile, personal computer, television. Subscriber interface cards 144-x-x of remote units 140-1, ... , 140-M receive the ADSL, ISDN and POTS traffic and directly map the data onto TDM transmission lines for transport to TDM-based network 150. ADSL, ISDN and POTS traffic is transported as TDM traffic. TDM-based network 150 receives  
20 ADSL, ISDN and POTS traffic from a number of remote units 140-1, ... , 140-M. TDM-based network 150 then transmits the ADSL, ISDN and POTS traffic as TDM traffic to a central unit 120. Central unit 120 receives the traffic and optionally transmits ATM traffic via a single ATM pipeline or user network interface after ATM processing by ATM processor and UNI card 128 or transmits the ATM traffic  
25 as TDM traffic via TDM lines e.g. E1s or T1s. The ADSL, ISDN and POTS traffic is transmitted to the PSTN, ATM switch, DSLAM or other appropriate ATM network for ATM processing, if required. Access Network 100 operates in a reverse manner in the downstream direction. Advantageously, ADSL services are integrated into a TDM network without an ATM infrastructure.

30 Figure 2 is a block diagram of an alternate embodiment of a central unit, indicated generally at 200, according to the teachings of the present invention.



Central unit 200 is coupled to an ATM multiplexer 295. Central unit 200 includes a plurality of interface cards 221.1, ... , 221.P without an ATM processor card 128 as included in central unit 120 of Figure 1. Central unit 200 includes a TDM matrix card 222 and a transmission interface device 224 coupled to a TDM bus 226.

- 5    Transmission interface device 224 includes any one of an optical transmission interface device, a copper wire transmission interface device, an HDSL transmission interface device or the like.

Central unit 200 receives ADSL, ISDN and POTS traffic from a TDM-based network such as TDM-based network 150 described with respect to Figure 1. The  
10    ADSL, ISDN and POTS traffic is then transmitted by each interface card 221 onto a plurality of TDM transmission lines such as E1s or T1s to an external ATM multiplexer 295 which takes the E1s or T1s processes them for transmission to the PSTN, ATM switch, DSLAM or other appropriate network. The ADSL, ISDN and POTS traffic is transmitted via TDM interface cards 221.1, ... , 221.P at a TDM  
15    level without any ATM processing. Similarly ADSL, ISDN and POTS traffic is received by TDM interface cards 221.1, ... , 221.P via TDM transmission lines for further transmission to an TDM-based network and a plurality of remote units 140-1 to 140-M as discussed with respect to Figure 1.

In one embodiment, interface cards 221-1, ... , 221-P comprise E1 interface  
20    cards that link data from and to Nx E1 transmission lines.

In operation, central unit 200 is functional in an access network 100 as described with respect to Figure 1. In the upstream direction, central unit 200 receives ADSL, ISDN and POTS traffic and transmits the traffic as TDM traffic via TDM lines e.g. E1s or T1s. The ADSL, ISDN and POTS traffic is transmitted to an  
25    external ATM multiplexer 295 which takes the E1s or T1s processes them for transmission to the PSTN, ATM switch, DSLAM or other appropriate network. In one embodiment the ATM multiplexer is an ADC Kentrox AAC Access Concentrator. Central unit 200 operates in a reverse manner in the downstream direction. Advantageously, ADSL services are available in a TDM network without  
30    an ATM infrastructure and without ATM processing.

Figure 3 is a block diagram that illustrates an embodiment of an Asymmetric Digital Subscriber Line Interface Card, indicated generally at 300, according to the teachings of the present invention. ADSL interface card 300 directly maps ATM traffic from subscriber's ADSL lines onto TDM lines, e.g. T1 or E1 lines, without performing ATM processing. ADSL interface card 300 includes a splitter 301 coupled to an ADSL interface device 304 and a POTS circuit 303. Data received on ADSL lines from subscribers is separated by splitter 301 into ATM data and POTS data. POTS data is transmitted to the POTS circuit 303 and then to the TDM interface 310 where it is joined with the ATM data to be transmitted as TDM traffic.

10 The ATM data is received by the ADSL interface device 304 and based on the amount and type of ATM data (e.g. high, low, medium bandwidth) it is determined whether or not a translation header is required to transport the data. Data requiring a translation header is transmitted to the translation device 306 for assignment.

ADSL interface card 300 operates in low, medium and high bandwidth modes. In the low bandwidth mode, low bandwidth ATM data (e.g., ADSL services for the internet where a few hundred kilobits are required) is received by the ADSL interface device 304 from a plurality of ADSLs and transmitted to translation device 306 for header translation processing. The header translation process includes looking at the virtual path identifier (VPI) and combining the VPI with a port number. The port number corresponds to a respective ADSL port where the data is received. The ATM data is then directly mapped onto a single transmission line, e.g. E1 or T1 line by inverse multiplexer/TDM physical interface device 308 and transmitted to the TDM interface 310. The data is then transmitted to a TDM bus for further transmission to a TDM-based network. Inverse multiplexer/TDM physical interface device 308 performs ATM inverse multiplexing and ATM TDM physical interface and will be referred to in this application as an inverse multiplexer.

20  
25

In the moderate bandwidth mode, moderate bandwidth ATM data (e.g., ADSL services requiring less than approximately 1.544 Mbps for T1 and less than approximately 2.048 for E1) is received by ADSL interface device 304 from a plurality of ADSLs and transmitted to inverse multiplexer 308. The ATM data is

30

then directly mapped onto a plurality of TDM transmission lines, e.g. T1 or E1, on a one to one basis. For example 3 moderate ADSLs are directly mapped onto 3 E1 or T1 lines. ADSL card 300 can accommodate up to 4 ADSLs to be directly mapped onto 4 E1 or T1 lines. The ATM data is then transmitted to TDM interface 310 via  
5 the E1 or T1 transmission lines for further transmission to an access network.

In a high bandwidth mode, high bandwidth ATM data (i.e. video) is received by ADSL interface device 304 from a plurality of ADSLs and transmitted to inverse multiplexer 308. The ATM data is then directly mapped onto a plurality of E1 or T1 transmission lines where up to four E1s or T1s operate as a single high bandwidth  
10 pipe. Inverse multiplexer 308 allows the E1s or T1s to be shared as a single pipe with approximately 8 Mbps of bandwidth. The ATM data is then transmitted to TDM interface 310 via the E1 or T1 transmission lines for further transmission to an access network.

ADSL interface card 300 also operates in reverse where it receives low,  
15 moderate and high bandwidth data from a TDM-based network on TDM transmission lines and transmits the data to subscribers via ADSLs. The data is received at TDM interface 310 from a TDM bus. The data is split into ATM and POTS traffic. POTS traffic is transmitted to POTS circuit 303 and then to splitter 301 for transmission to subscribers. ATM traffic is transmitted to inverse  
20 multiplexer 308 and directly mapped onto ADSLs for transmission to subscribers. ATM data directly mapped onto ADSLs is transmitted to ADSL interface device 304 and to splitter 301 for transmission to designated subscribers.

#### Conclusion

Although specific embodiments have been illustrated and described in this  
25 specification, it will be appreciated by those of ordinary skill in the art that any arrangement that is calculated to achieve the same purpose may be substituted for the specific embodiment shown. This application is intended to cover any adaptations or variations of the present invention. For example, the integrated ADSL interface card in one embodiment is part of a digital loop carrier. In further  
30 embodiments, the integrated ADSL interface card is located in a central office. It is understood that the integrated ADSL interface card can be

implemented with any appropriate combination of services whether conventional or later developed. Additionally, the central unit in one embodiment maps ATM traffic onto a single UNI and in another embodiment the central unit maps ATM traffic onto TDM lines. It is understood that the central unit can be implemented to map

5 ATM, POTS, ISDN and other digital or analog traffic onto one or more transmission lines, e.g. E1s, T1s, STM-1, etc., whether conventional or later developed.

What is claimed is

1. A telecommunications access network, comprising:  
a plurality of remote units, wherein each of the plurality of remote units includes a first time division multiplex bus;  
a time division multiplex-based network coupled to the plurality of remote units;  
a central unit coupled to the time division multiplex-based network; and  
wherein asynchronous transfer mode traffic is directly mapped onto the first time division multiplex bus.
2. The telecommunications network of claim 1, wherein the plurality of remote units comprises:  
a plurality of subscriber interface cards coupled to the first time division multiplex bus; and  
a transmission interface device coupled to the first time division multiplex bus.
3. The telecommunications access network of claim 2, wherein the plurality of interface cards includes at least one asymmetric digital subscriber line interface card which directly maps the asynchronous transfer mode traffic onto the first time division multiplex bus.
4. The telecommunications access network of claim 3, wherein the asymmetric digital subscriber line interface card comprises an inverse multiplexer.
5. The telecommunications access network of claim 1, wherein the central unit includes:  
a second time division multiplex bus; and  
a plurality of interface cards coupled to the second time division multiplex bus.

6. The telecommunications network of claim 5, wherein the plurality of interface cards comprise a plurality of time division multiplex interface cards.
7. The telecommunications network of claim 6, further comprising an asynchronous transfer mode multiplexer coupled to the central unit.
8. The telecommunications network of claim 5, wherein one of the plurality of time division multiplex interface cards comprises an asynchronous transfer mode processor and a user network interface.
9. A telecommunications network comprising:
  - a remote unit, comprising:
    - a plurality of subscriber interface cards;
    - a first time division multiplex bus coupled to the plurality of interface cards;
    - a time division multiplex switching device coupled to the first time division multiplex bus;
    - a transmission interface device coupled to the first time division multiplex bus; and
    - wherein the remote unit directly maps asynchronous transfer mode traffic onto a plurality of time division multiplex lines;
  - a time division multiplex based-network; and
  - at least one central unit coupled to the time division multiplex based-network.
10. The telecommunications network of claim 9, wherein the plurality of subscriber interface cards include at least one asymmetric digital subscriber line interface card.

11. The telecommunications network of claim 9, wherein the central unit includes:
- a second time division multiplex bus; and
  - a plurality of interface cards coupled to the second time division multiplex bus.
12. The telecommunications network of claim 11, wherein the plurality of interface cards comprise a plurality of time division multiplex interface cards.
13. The telecommunications network of claim 11, wherein one of the plurality of interface cards comprise an asynchronous transfer mode processor and a user network interface.
14. The telecommunications network of claim 12, further comprising an asynchronous transfer mode multiplexer coupled to the central unit.
15. A telecommunications network, comprising:
- a plurality of remote units, wherein each of the plurality of remote units includes a time division multiplex bus;
  - a central unit coupled to the plurality of remote units; and
  - wherein asynchronous transfer mode traffic is directly mapped onto a plurality of time division multiplex lines.
16. The telecommunications network of claim 15, wherein each of the plurality of remote units includes:
- a plurality of subscriber interface cards coupled to the time division multiplex bus; and
  - a transmission interface device coupled to the time division multiplex bus.

17. The telecommunications network of claim 16, wherein the plurality of interface cards comprise an asymmetric digital subscriber line interface card which directly maps the asynchronous transfer mode traffic onto the plurality of time division multiplex lines.

18. The telecommunications network of claim 15, wherein the central unit includes:

- a time division multiplex bus; and
- a plurality of interface cards coupled to the time division multiplex bus.

19. The telecommunications network of claim 18, wherein the plurality of interface cards comprises a plurality of time division multiplex cards.

20. The telecommunications network of claim 18, wherein one of the plurality of interface cards comprise an asynchronous transfer mode processor and user network interface.

21. The telecommunications network of claim 19, further comprising an asynchronous transfer mode multiplexer coupled to the central unit.

22. A time division multiplex remote unit, comprising:

- a time division multiplex bus;
- a plurality of subscriber interface cards coupled to the time division multiplex bus;
- a time division multiplex matrix device coupled to the time division multiplex bus;
- a transmission interface device coupled to the time division multiplex bus;
- and
- wherein the plurality of subscriber interface cards comprise at least one asymmetric digital subscriber line interface card.



23. The remote unit of claim 22, wherein the transmission interface device is an optical transmission interface device.
24. The remote unit of claim 22, wherein the transmission interface is a high bit rate digital subscriber line interface device.
25. An asymmetric digital subscriber line interface card, comprising:  
an asymmetric digital subscriber line interface device;  
a translation device coupled to the asymmetric digital subscriber line interface device;  
an inverse multiplexer coupled to the asymmetric digital subscriber line interface device that directly maps asynchronous transfer mode directly to time division multiplex; and  
a time division multiplex interface coupled to the inverse multiplexer.
26. An asymmetric digital subscriber line interface card, comprising:  
a splitter;  
an asymmetric digital subscriber line interface device coupled to the splitter;  
a plain old fashioned telephone service (POTS) line termination circuit coupled to the splitter;  
a translation device coupled to the asymmetric digital subscriber line interface device;  
an inverse multiplexer coupled to the asymmetric digital subscriber line interface device that directly maps asynchronous transfer mode to time division multiplex; and  
a time division multiplex interface coupled to the inverse multiplexer.
27. A method of transferring digital data, the method comprising:  
receiving analog and digital data;  
separating the digital data from the analog data;

preparing the digital data for transmission; and  
directly mapping the digital data onto a time division multiplex transmission line.

28. The method of claim 27, wherein preparing the digital data for transmission comprises combining a virtual path identifier for the digital data with a port number.

29. A method of transporting asynchronous transfer mode (ATM) data on a digital loop carrier platform, the method comprising:  
receiving asynchronous transfer mode (ATM) traffic and plain old fashioned telephone service (POTS) traffic;  
separating the ATM traffic from the POTS traffic;  
transporting the POTS traffic to a time division multiplex bus;  
determining if a translation header is required for the ATM traffic;  
when a translation header is required, assigning a translation header to the ATM traffic;  
directly mapping the ATM traffic to at least one time division multiplex transmission line;  
transporting the ATM traffic to the time division multiplex bus; and  
transmitting the ATM traffic with the POTS traffic to an access network.

30. A method of transporting low bandwidth asynchronous transfer mode data on a digital loop carrier platform, the method comprising:  
receiving asynchronous transfer mode (ATM) traffic and plain old fashioned telephone service (POTS) traffic from a plurality of asymmetric digital subscriber lines;  
separating the ATM traffic from the POTS traffic;  
transporting the POTS traffic to a time division multiplex bus;  
assigning a translation header to the ATM traffic;  
directly mapping the ATM traffic to one time division multiplex transmission line;

transporting the ATM traffic to the time division multiplex bus; and  
transmitting the ATM traffic with POTS traffic to an access network.

31. A method of transporting asynchronous transfer mode data on a digital loop carrier platform, the method comprising:

receiving asynchronous transfer mode (ATM) traffic and plain old fashioned telephone service (POTS) traffic from a plurality of asymmetric digital subscriber lines;

separating the ATM traffic from the POTS traffic;

transporting the POTS traffic to a time division multiplex bus;

directly mapping the ATM traffic to a plurality of time division multiplex transmission lines;

transporting the ATM traffic to the time division multiplex bus; and

transmitting the ATM traffic with POTS traffic to an access network.

32. The method of claim 31, wherein receiving ATM and POTS traffic from a plurality of asymmetric digital subscriber lines comprises receiving ATM and POTS traffic from four asymmetric digital subscriber lines and wherein directly mapping the ATM traffic to a plurality of time division multiplex transmission lines comprises directly mapping the ATM traffic to four time division multiplex transmission lines.

1/4

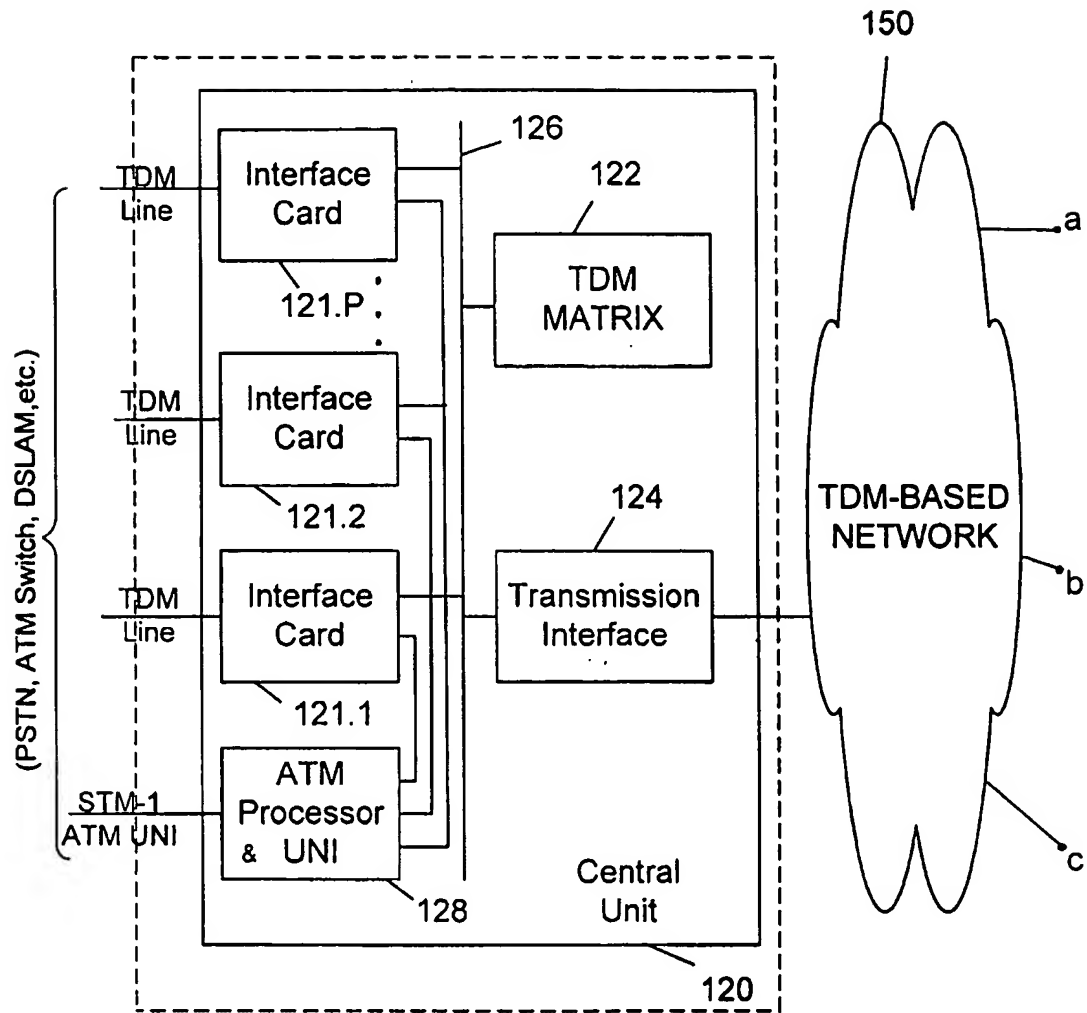


Fig. 1

2/4

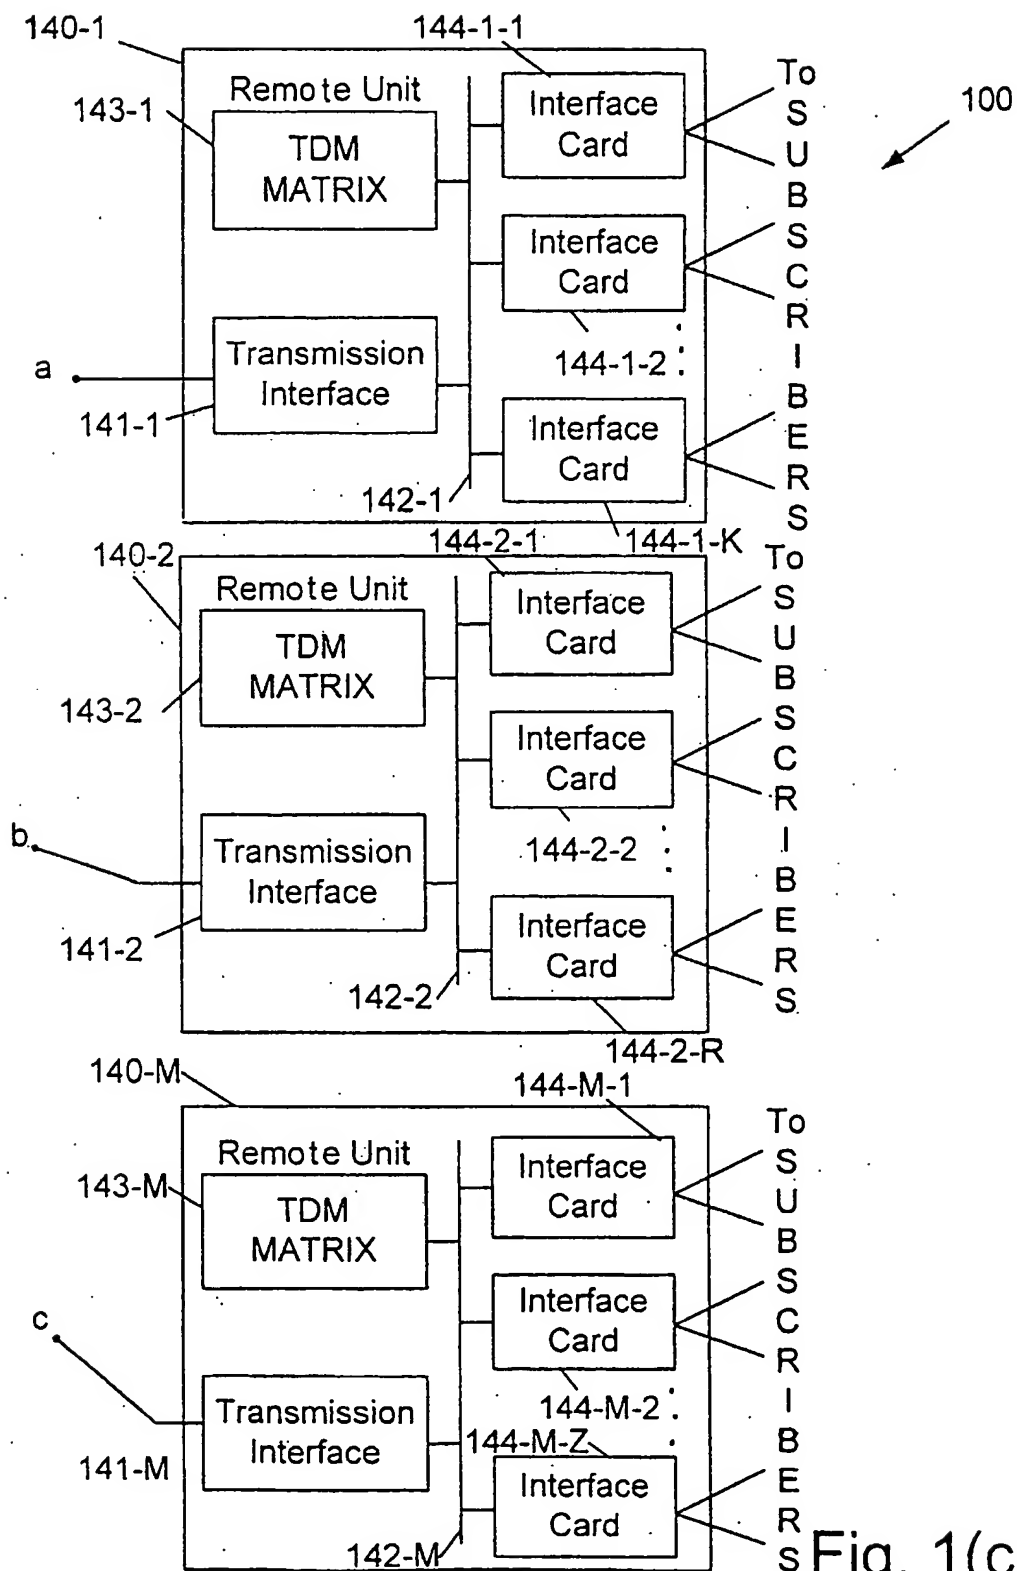


Fig. 1(cont.)

3/4

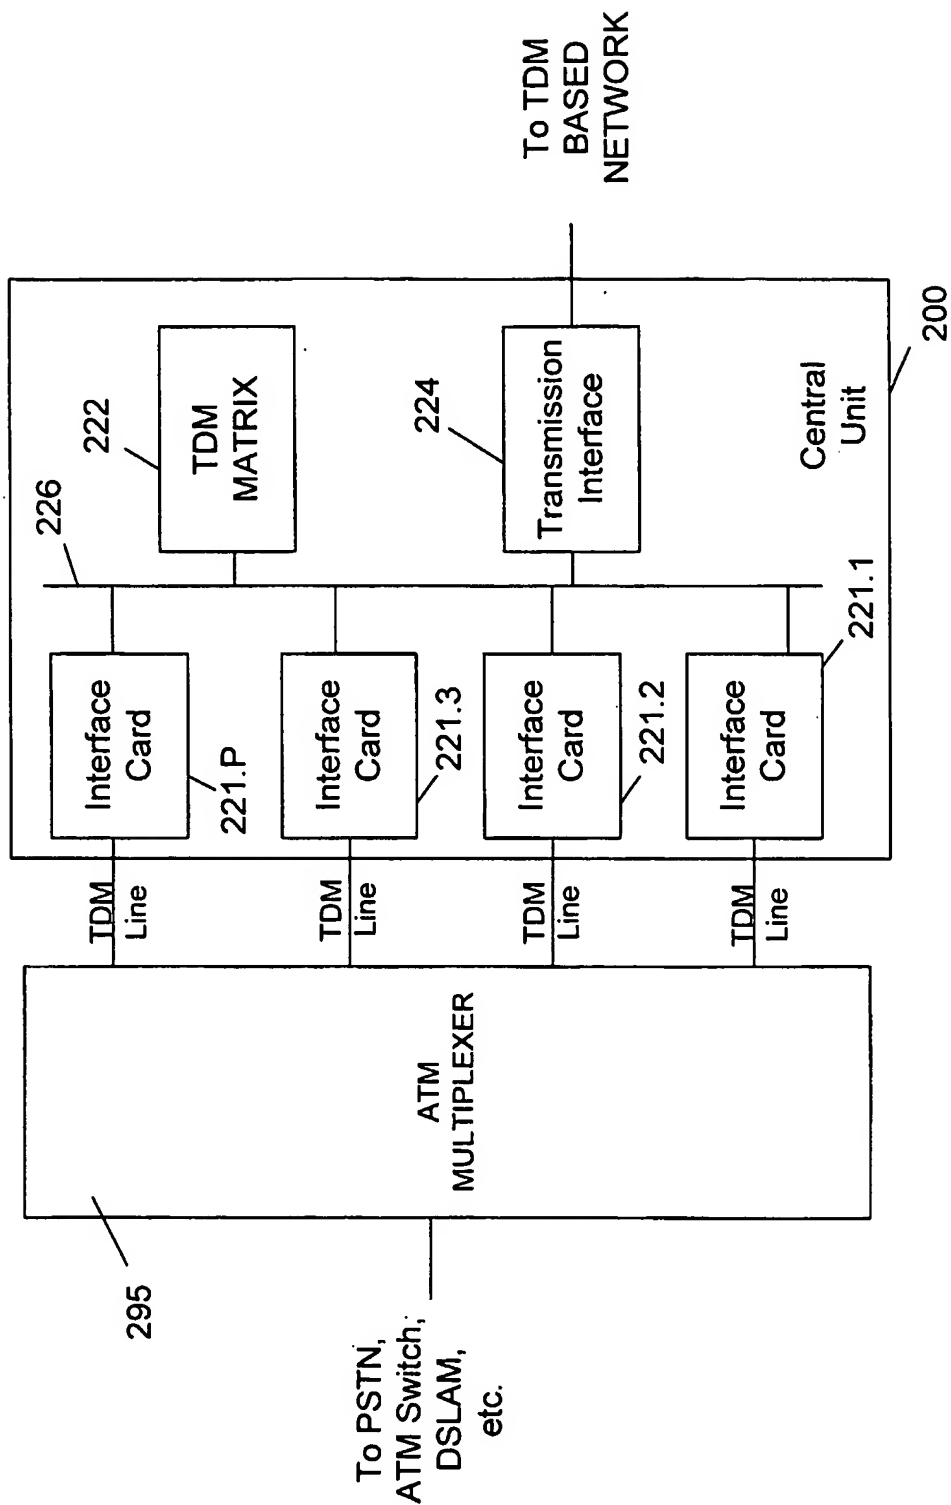


Fig. 2

4/4

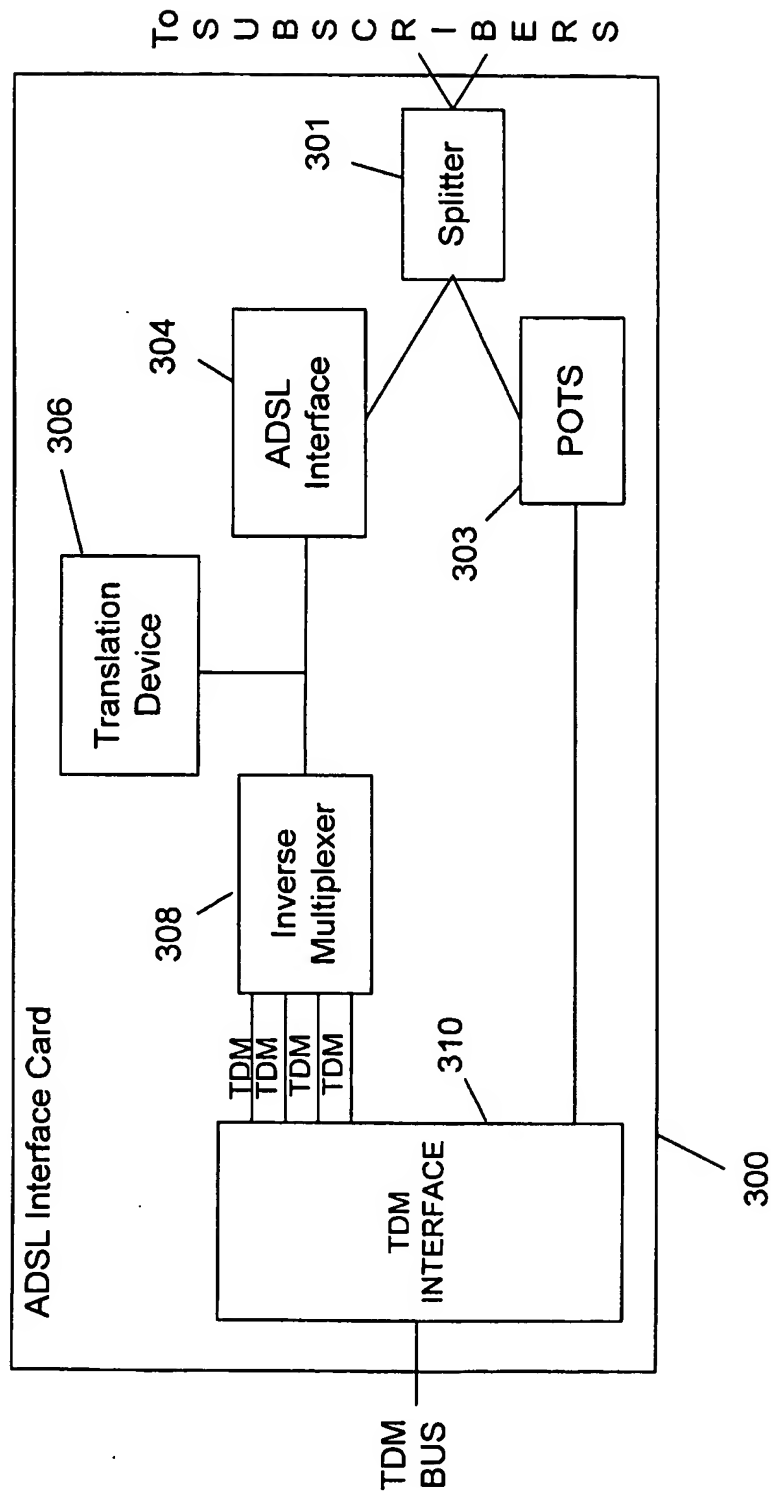


Fig. 3

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
4 October 2001 (04.10.2001)

PCT

(10) International Publication Number  
**WO 01/73987 A3**

- (51) International Patent Classification<sup>7</sup>: **H04L 12/64** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (21) International Application Number: PCT/IB01/00501
- (22) International Filing Date: 27 March 2001 (27.03.2001)
- (25) Filing Language: English
- (26) Publication Language: English (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (30) Priority Data:  
09/539,262 30 March 2000 (30.03.2000) US
- (71) Applicant: ADC TELECOMMUNICATIONS ISRAEL LTD. [IL/IL]; 10 Ha'Sadnaot Street, 46120 Herzliya (IL).
- (72) Inventors: KLIPPER, Joshua; 3A Harav Hachohen Hanazir Street, 42369 Netanya (IL). ROUCHBACH, David; Charzit 5/1, 42490 Netanya (IL). DRORI, Nir; 79 Harav David Israel Street, 75506 Rehovot (IL).
- (74) Agent: LUZZATTO, Kfir; Luzzatto & Luzzatto, P.O. Box 5352, 84152 Beer-Sheva (IL).
- Published:  
— with international search report
- (88) Date of publication of the international search report:  
20 June 2002
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: INTEGRATED ADSL INTERFACE WITH TDM MAPPING

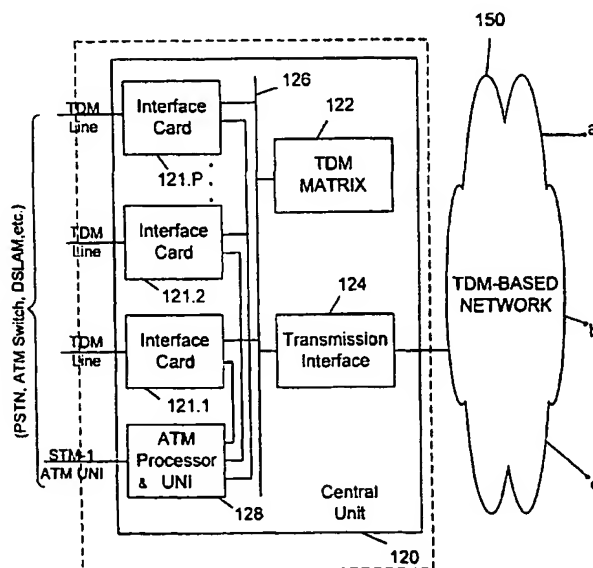

(57) Abstract: An integrated asymmetric digital subscriber line interface card with time division multiplex mapping is provided. The asymmetric digital subscriber line interface card includes an asymmetric digital subscriber line interface device and a translation device coupled to the asymmetric digital subscriber line interface device. Additionally, the asymmetric digital subscriber line interface card includes an inverse multiplexer coupled to the asymmetric digital subscriber line interface device and a time division multiplex interface coupled to the inverse multiplexer.

WO 01/73987 A3



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 01/00501

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04L12/64

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 11880 A (ALCATEL USA SOURCING LP) 2 March 2000 (2000-03-02) page 1, line 25 -page 3, line 4 figure 1 page 5, line 9 - line 14 ----	1,2,9, 15,22,25
A	GB 2 320 642 A (IBM) 24 June 1998 (1998-06-24) figure 2 ----	1-25
X	EP 0 891 067 A (ALSTHOM CGE ALCATEL) 13 January 1999 (1999-01-13) column 12, line 27 - line 54; figure 2 figure 8 ----	26-32
A	WO 98 47251 A (NEXT LEVEL COMM) 22 October 1998 (1998-10-22) figure 1 -----	26-32

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

3 January 2002

Date of mailing of the international search report

14.01.2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Gregori, S

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/IB 01/00501

### Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

### Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

#### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FROM PCT/SA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-25

Telecommunication access network with ADSL line card that maps asynchronous transfer mode traffic onto a time division multiplex bus

2. Claims: 26-32

Method and apparatus for splitting ATM traffic from POTS traffic

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 01/00501

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0011880	A	02-03-2000	AU 5684399 A EP 1104644 A2 WO 0011880 A2	14-03-2000 06-06-2001 02-03-2000
GB 2320642	A	24-06-1998	EP 0947086 A2 WO 9828901 A2 JP 2000505980 T US 6163535 A	06-10-1999 02-07-1998 16-05-2000 19-12-2000
EP 0891067	A	13-01-1999	US 6314102 B1 AU 7322998 A CN 1211129 A EP 0891067 A2 JP 11088376 A US 2001048679 A1	06-11-2001 21-01-1999 17-03-1999 13-01-1999 30-03-1999 06-12-2001
WO 9847251	A	22-10-1998	US 6282189 B1 AU 7111798 A BR 9808530 A EP 0976210 A2 JP 2001512649 T WO 9847251 A2 US 6208637 B1	28-08-2001 11-11-1998 13-06-2000 02-02-2000 21-08-2001 22-10-1998 27-03-2001